




INSTANT SHADE
UMBRELLAS

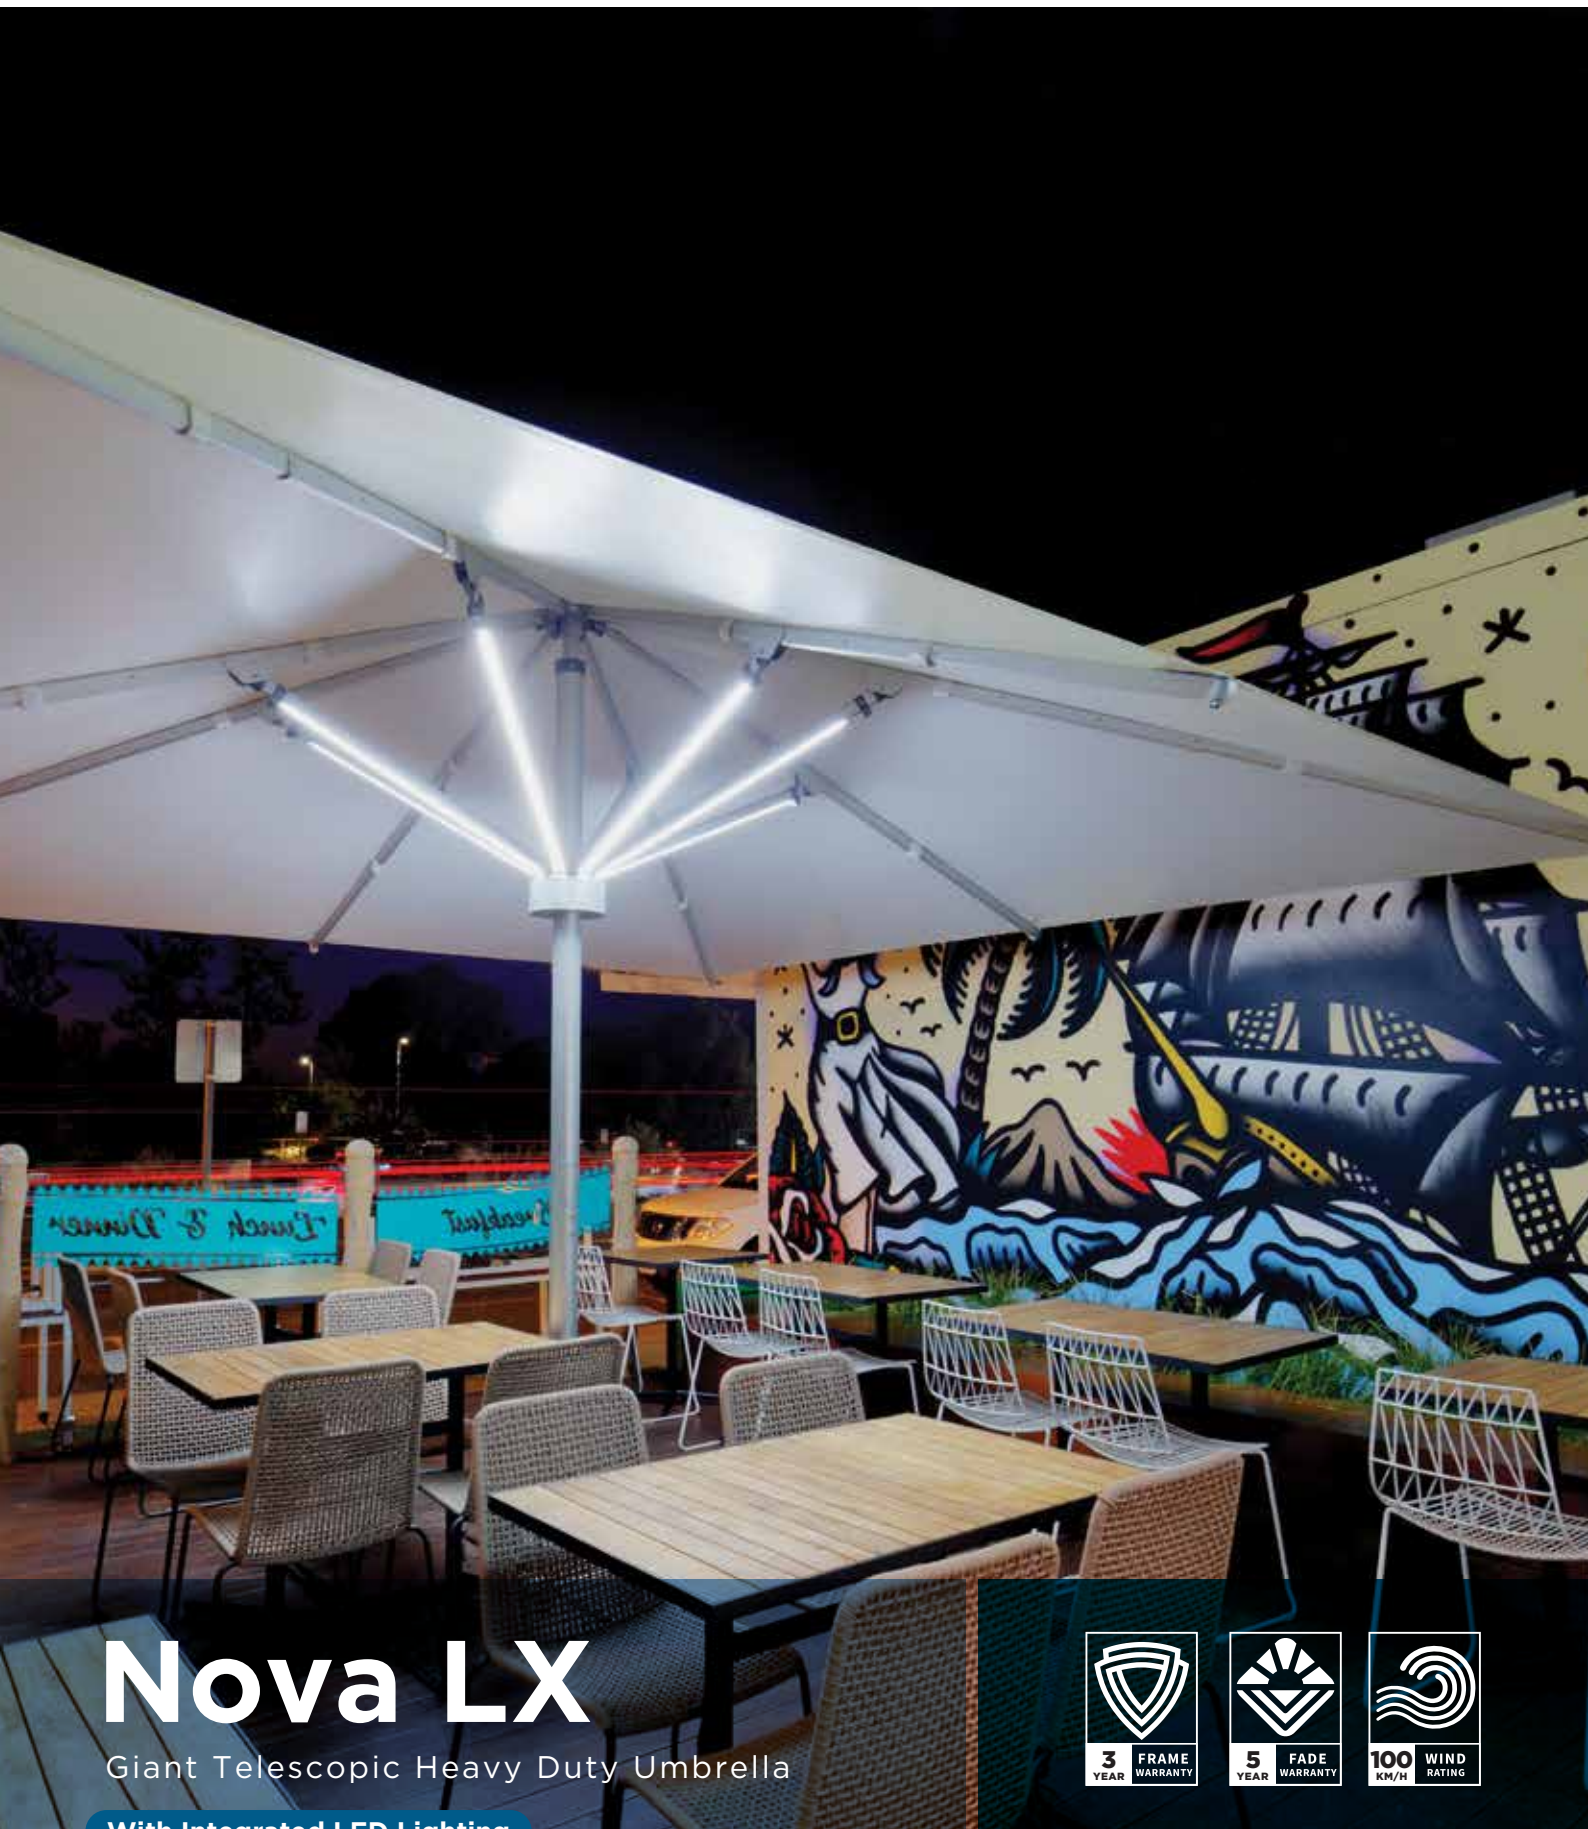

Nova LX

Giant Telescopic Heavy Duty Umbrella

With Integrated LED Lighting



3 YEAR FRAME WARRANTY



5 YEAR FADE WARRANTY




100 KM/H WIND RATING

instantshadeumbrellas.com.au

Find out more >



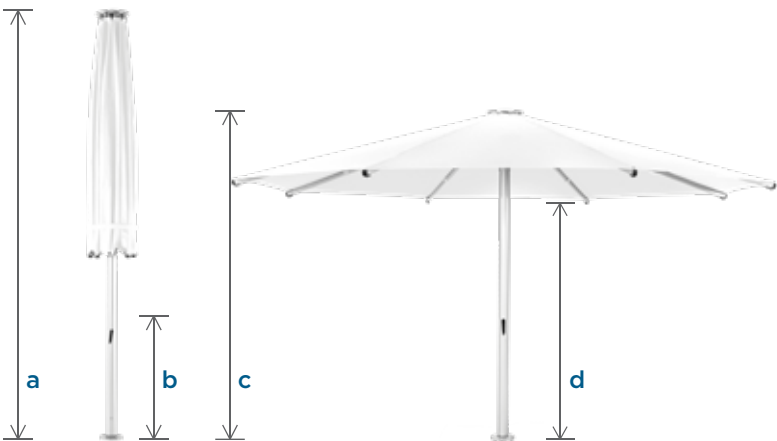

Canvas

Canopies are 100% solution-dyed premium acrylic canvas. They are water repellent and UV resistant (5-year warranty against fading).
Waterproof 750GSM welded PVC also available.

Integrated LED lighting

Lighting is pre-installed – it requires OPTIONAL Activation Kit to operate (sold separately).



Dimensions

*All measurements are rounded and are subject to change.
**Measurements depend on the age of the canopy. New canopies are stiffer and may reduce the umbrella height. The height will increase slightly as the canopy ages.

					
3m sq	4m sq	5m oct	5m sq	3.5 x 2.5m rect*	4 x 3m rect*

Dimensions of closed umbrella

a: Height (cm)	401	418	419	446	432	432
b: Closed canopy clearance (cm)	189	133	170	92	176	183

Dimensions of open umbrella**

c: Height (cm)	285	308	308	316	311	306
d: Height to edge of canopy (cm)	238	232	232	214	243	244

Packaging dimensions

Dimensions of cardboard packaging (cm)	420x46x46	453x46x46				
Weight (boxed umbrella) (kg)	100	100	110	115	100	100

Wind guidance***

Installed wind rating (km/h)	100	90	90	80	100	90
------------------------------	-----	----	----	----	-----	----

***Wind speeds are provided as a guide only. Refer to our website and Product Owner Manual provided with the umbrella for more information. The product warranty does not cover wind damage regardless of wind speed. °Non-Standard Size - Limited Availability.

Frame

Frame constructed from marine-grade anodised aluminium, backed by a 3-year warranty against mechanical defects. Features reinforced extrusions and a heavy-duty 94mm diameter mast.

Installation options

Umbrellas must be installed in accordance with manufacturer instructions and specifications.



Telescopic Crank



Reinforced Joints



Hinged spigot installation



Heavy duty mast



In-ground Fitting



Bolted base plate